




SCHNELLER®
Integrating Safety with Style™

AERMAT™ ST

Aermat ST has a set of raised, embossed ribs and improved slip resistance, which distinguish it from the standard Aermat. While the ribs improve slip resistance and enhance spill containment, the clear-coat surface makes cleaning faster and easier.

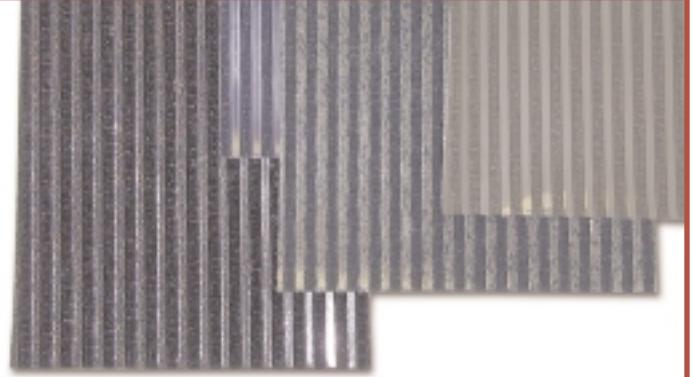

Product Features

- Engineered top surface to provide excellent slip resistance.
- Unlimited custom color and design availability is ensured and backed up by Schneller's well-equipped and experienced Design and Color Matching staffs.
- Flexible; highly durable; easy to install, clean and maintain.
- Developed to comply with the latest flammability requirements for aircraft flooring.

Product Specifications

- Supplied in continuous rolls 60 inches (1.5 meters) wide.
- Typical roll size is 40 linear yards (36 linear meters).
- Typical weight of roll is 225 pounds (102 kilograms).
- Freight classification for ground shipment – Sub 9, Class 70, Schedule B commodity number 5903.10.3000.

Available Backings

- 0.125-inch (3.2mm), 0.25-inch (6.4mm) closed-cell foam
- Rigid conolite
- Vinyl pyramid

Possible Applications

- Entryways
- Aisle runners
- Galley floors
- Air Stairs
- Lavatory floors

Data and information provided free of charge by Schneller, Inc., for corporate and/or educational informational purposes only. The information provided is believed to be accurate, but Schneller and its suppliers do not warrant or guarantee such accuracy. Schneller expressly assumes no responsibility for the accuracy or usefulness of information provided by any third party data or content provider. Schneller shall have no obligation to update or otherwise supplement or correct any data provided. Neither Schneller nor any of its data or content providers shall be liable for any errors or delays in the content, or for any actions taken in reliance thereon.

6019 Powdermill Road, Kent, Ohio 44240 USA • phone: 330.673.1400 • fax: 330.673.6374 • www.schneller.com
Schneller SARL • 6 Rue Rougemont/2ET, 75009 Paris, France • phone: 011 33 1533 49 080 • fax: 011 33 1533 49 089



ISO-9001-94